




Product availability: Stock - Normally stocked in distribution facility

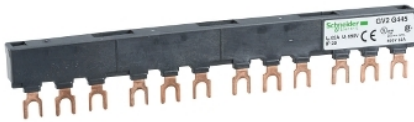

### Main

Range	Linergy
Product name	FT
Device short name	GV2G
Product or component type	Comb busbar
Accessory / separate part category	Connection accessory
Poles description	3P
Range compatibility	TeSys D TeSys GV2 TeSys K TeSys U
Number of tap-offs	4
[I <sub>th</sub> ] conventional free air thermal current	63 A
Connection pitch	1.77 in (45 mm)

### Complementary

Mounting location	On terminal
[U <sub>i</sub> ] rated insulation voltage	690 V
Length	7.05 in (179 mm)
Net weight	0.17 lb(US) (0.077 kg)

### Ordering and shipping details

Category	22367 - MANUAL STR PROTECTOR - GV2
Discount Schedule	I11
GTIN	00785901555889
Package weight(Lbs)	0.08 kg (0.18 lb(US))
Returnability	Yes
Country of origin	RO


### Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	No need of specific recycling operations

### Contractual warranty

Warranty	18 months
----------	-----------

Sets of Busbars GV2G445, GV2G454, GV2G472, with Terminal Block GV2G05

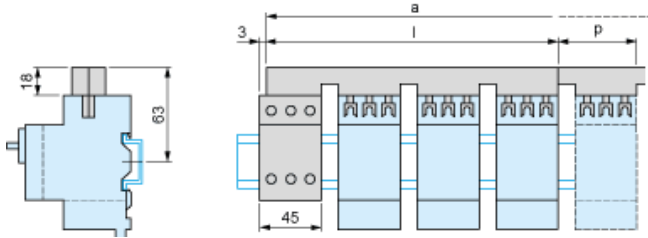

	l	p
GV2G445 (4 x 45 mm)	179	45
GV2G454 (4 x 54 mm)	206	54
GV2G472 (4 x 72 mm)	260	72

Number of tap-offs	a			
	5	6	7	8
GV2G445	224	269	314	359
GV2G454	260	314	368	422
GV2G472	332	404	476	548